


Quick Start X-VMS Client Software


After installing the software, follow the below instructions.

Create an admin password

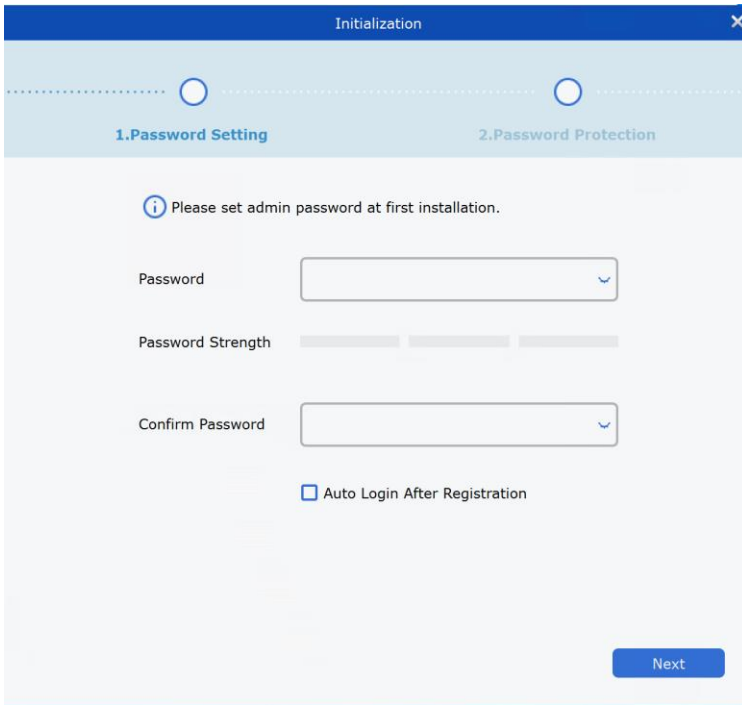


The screenshot shows the 'Initialization' window with a progress bar at the top. The first step, '1. Password Setting', is active. An information icon and text state: 'Please set admin password at first installation.' Below this are three input fields: 'Password', 'Password Strength' (a progress bar), and 'Confirm Password'. A checkbox for 'Auto Login After Registration' is present and unchecked. A blue 'Next' button is at the bottom right.

Login

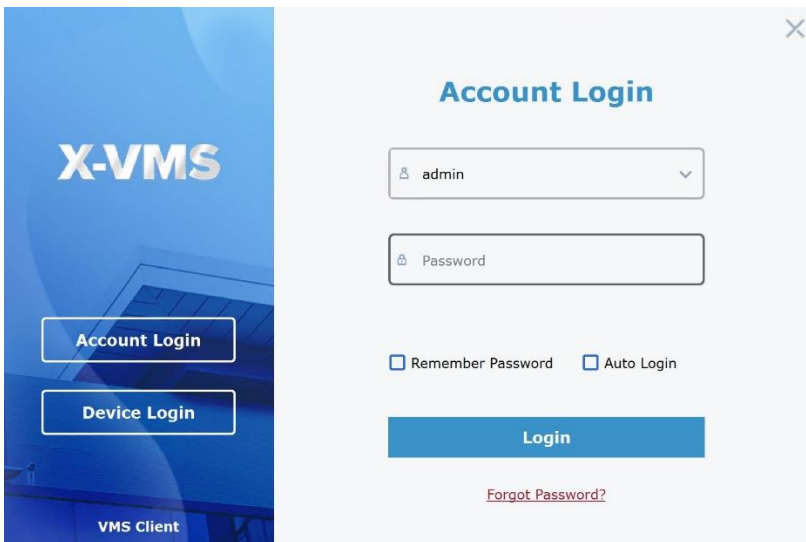


The screenshot shows the 'Account Login' window. On the left is a blue sidebar with the 'X-VMS' logo and buttons for 'Account Login' and 'Device Login'. The main area has a title 'Account Login' and a dropdown menu with 'admin' selected. Below is a password field with a lock icon. There are two checkboxes: 'Remember Password' and 'Auto Login', both unchecked. A blue 'Login' button is at the bottom, with a red link for 'Forgot Password?' below it.


Click Home

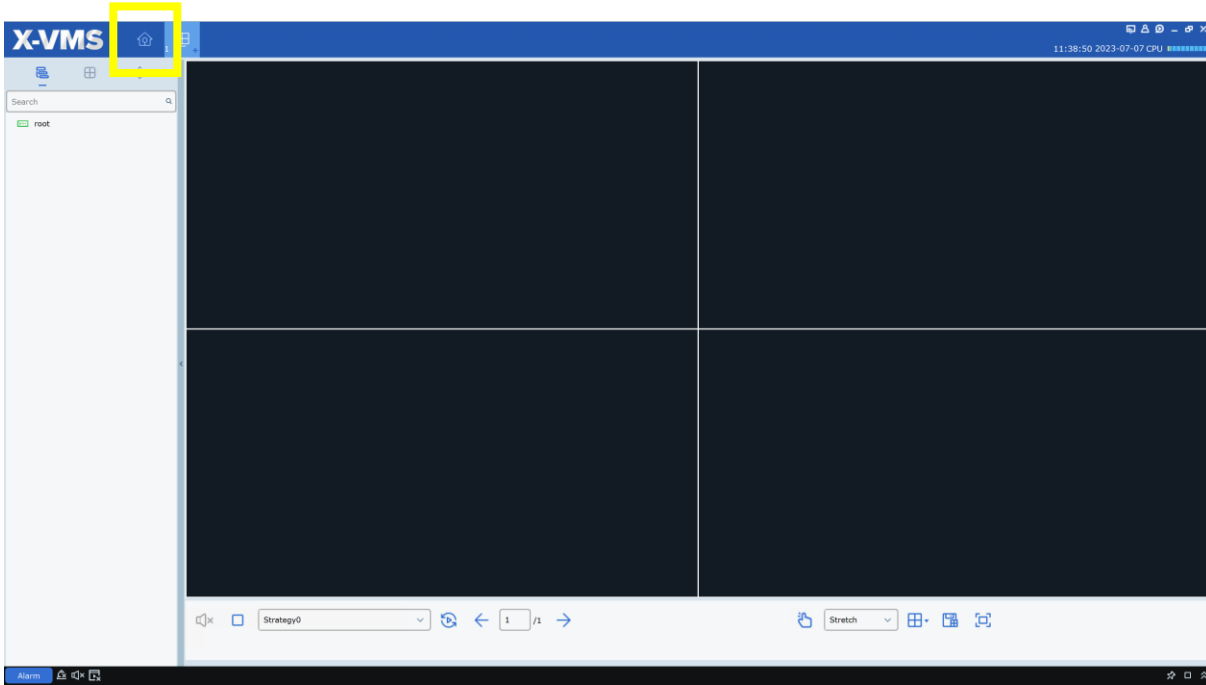


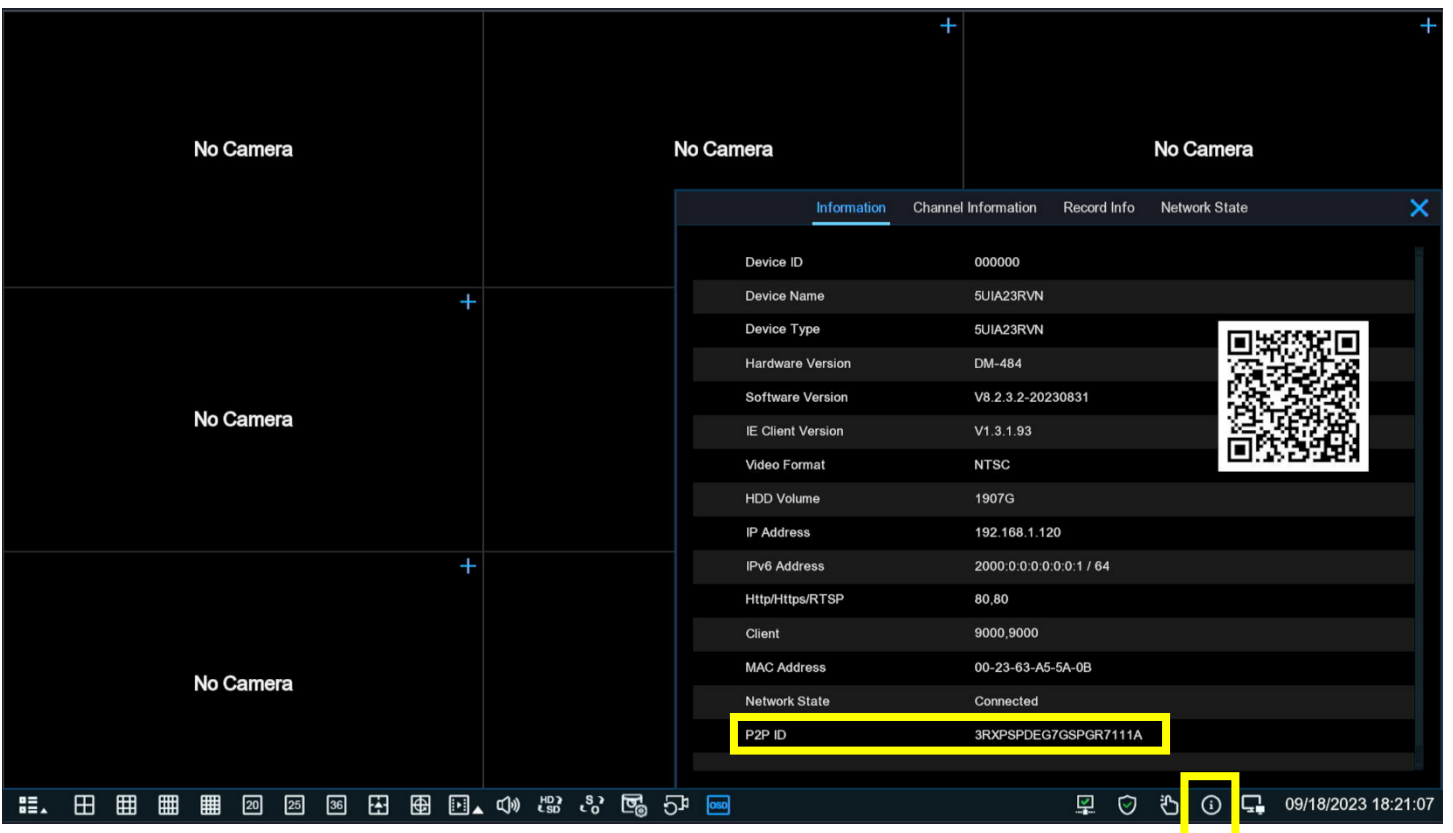
Click Device Management

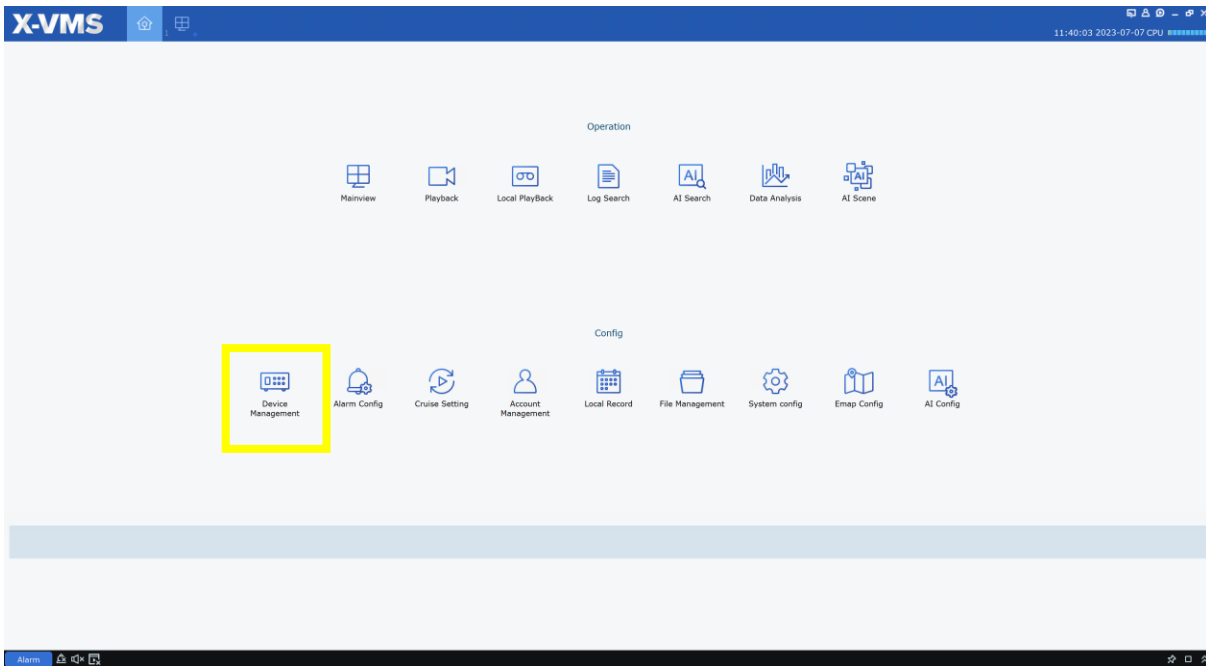

Click Plus Sign to add a Device

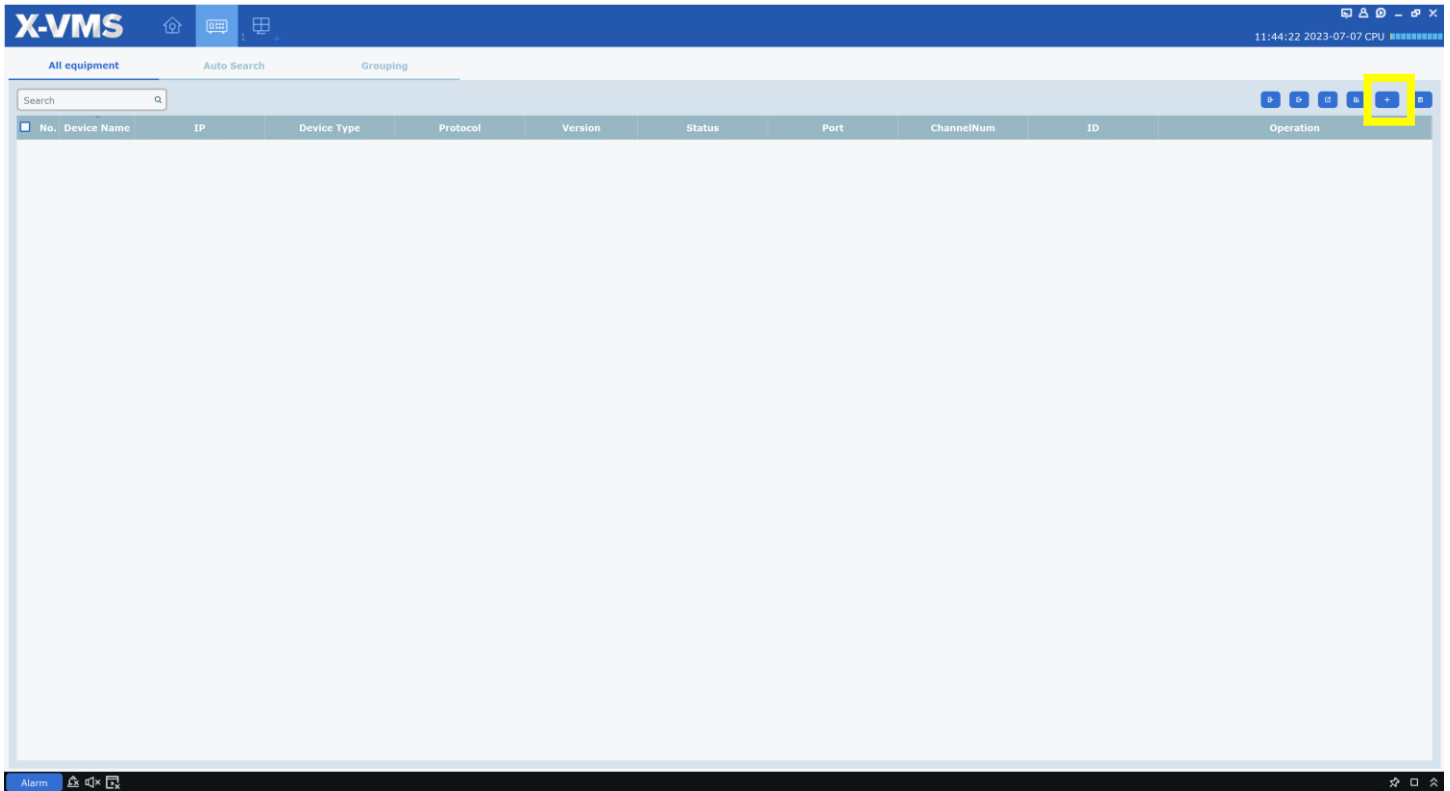

You will need the P2P ID from the NVR/XVR. This can be found by logging into the system and clicking the  icon in the status bar in the lower right of the screen. Alternatively, you can scan the QR code on the outside of the machine and this scan will reveal the P2P ID to you.



Device Name: [Enter any name you wish]

Login Type: ID

ID: [enter the P2P ID from above]

Protocol: Private

Http Port: 80

User Name: admin


Password: [enter the password of your NVR]

The image shows a software dialog box titled "Add Device". It contains the following fields and values:


- Device Name: Demo
- Login Type: ID
- ID: 7JNMB9EF2UFFRPWM111A
- Protocol: Private
- Http Port: 80
- User Name: admin
- Password: [masked]

At the bottom of the dialog are two buttons: "Add" and "Cancel".

Connection Success when status goes Green, if not green, you can hover over the icon to get failure details.

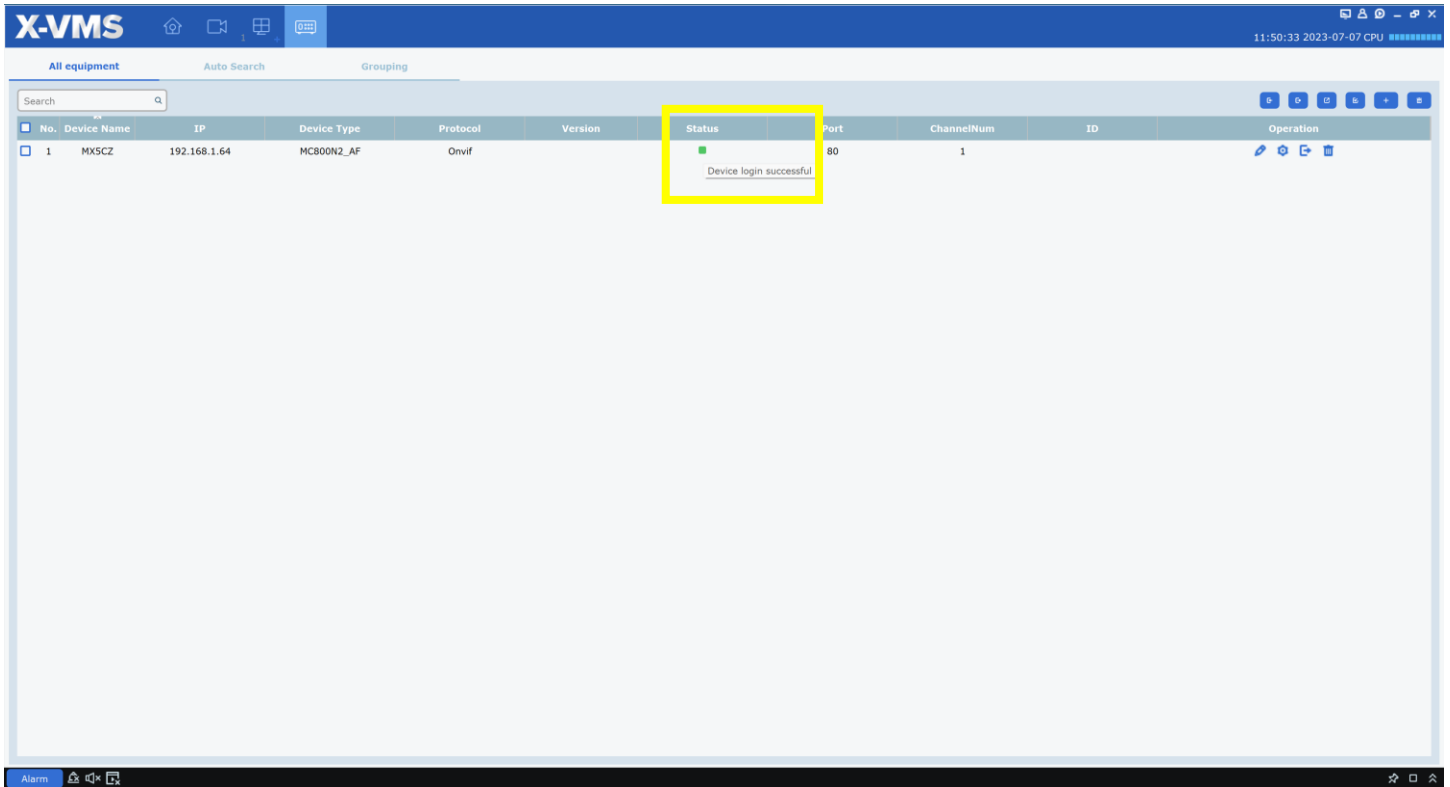

Click Mainview to view cameras

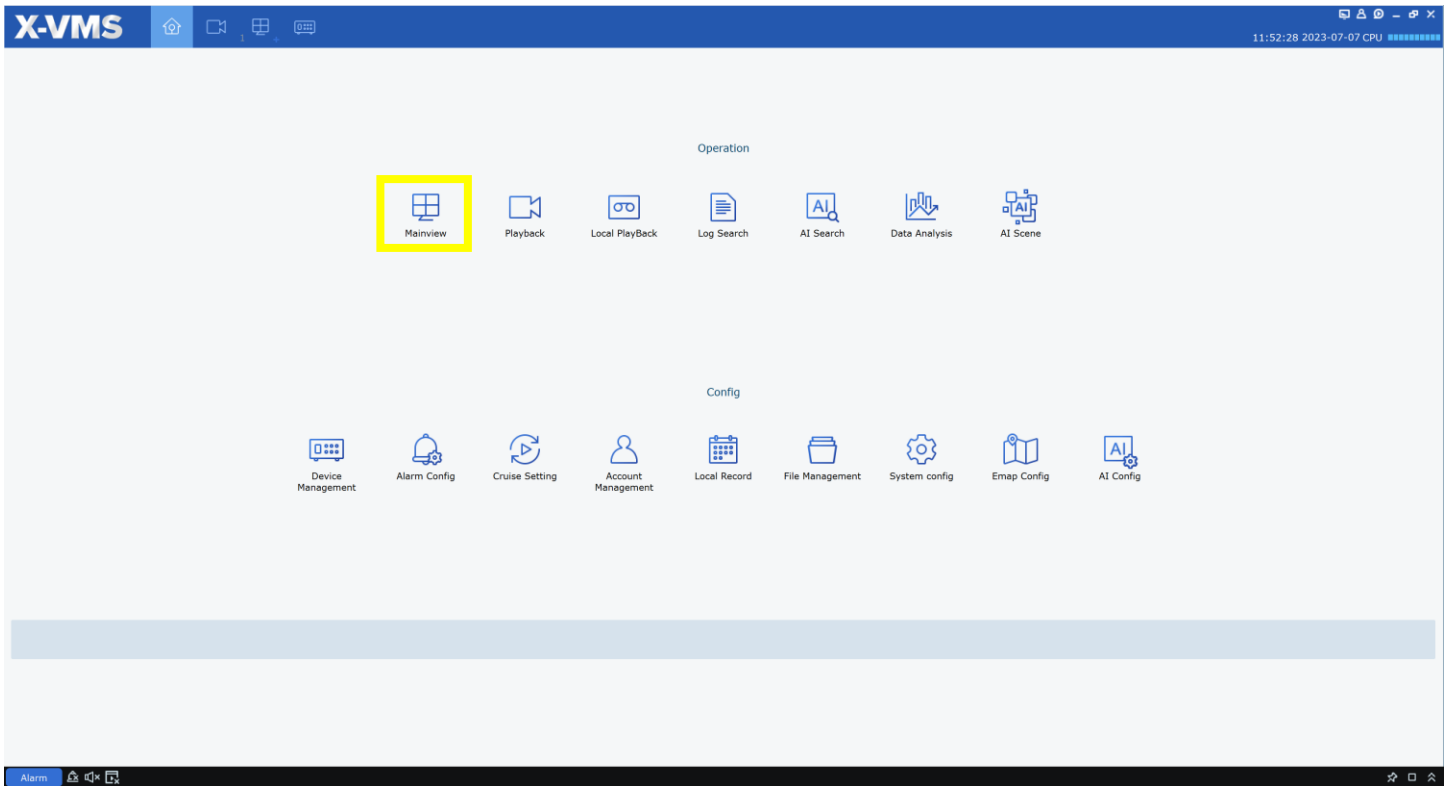

Preview – Right-Click your device and Open all channels. You can change the grid view by clicking the Grid icon.

